


GUIDANT

HI-TORQUE PILOT™ Family of Guide Wires

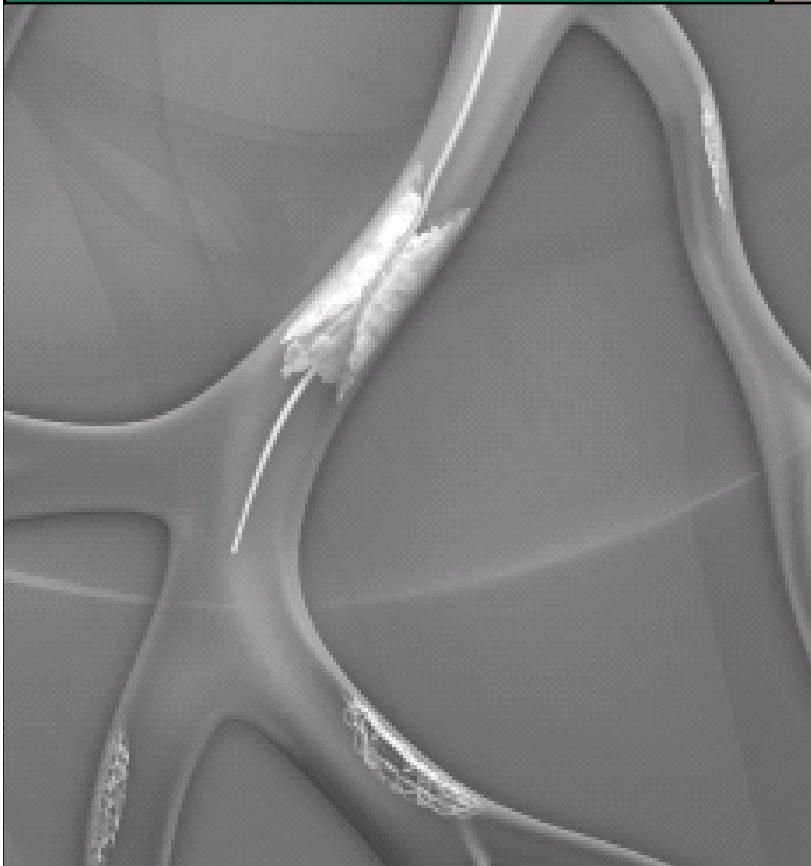


When it comes to challenging cases, you're in total control.

Polymer-tip wires, for your challenging cases

The new HI-TORQUE PILOT™ family of guide wires is designed to tackle your challenging cases. It's unique tip and core design provide the combination of stiffness and control that physicians look for when crossing chronic occlusions.

1) Tip Control


- Modified RESPONSEASE™ parabolic-ground core for enhanced torque transmission*
- Tip coils under a polymer cover designed for tip shape retention and tactile feedback
- Core-to-Tip design for excellent control
- DURASTEEL™ core material for excellent tip shape retention

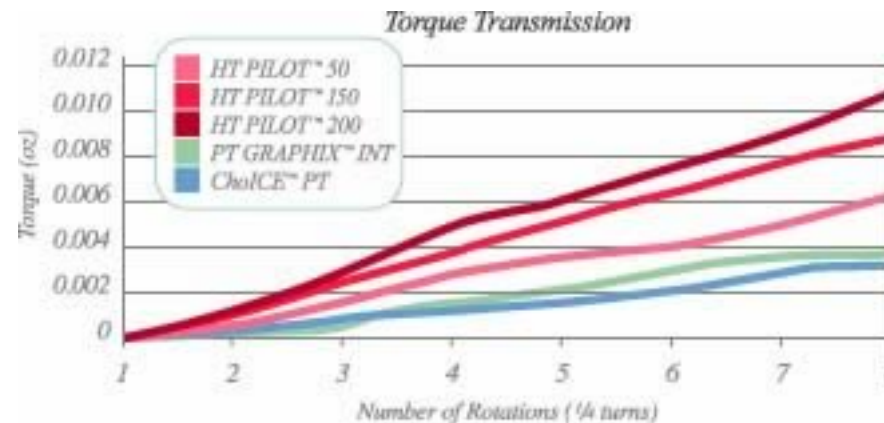

* As compared to CHOICE® PT and PT GRAPHIX™ INT. Tests performed by and data on file at Guidant.


2) Tip Options

- Three levels of tip stiffness, for a graduated approach to treating difficult lesions
- HI-TORQUE PILOT™ 50 guide wire has similar tip stiffness to ChoICE® PT and PT GRAPHIX™ INT

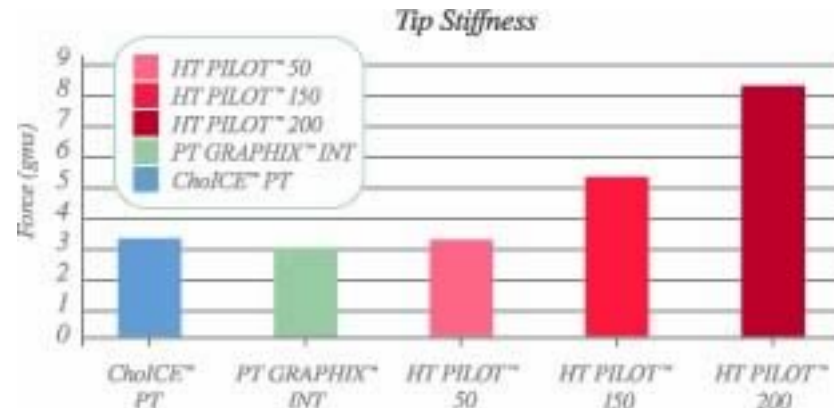


3) Additional Support

- DURASTEEL™ material enhances core strength
- Modified RESPONSEASE™ core delivers superb tracking while providing additional support *


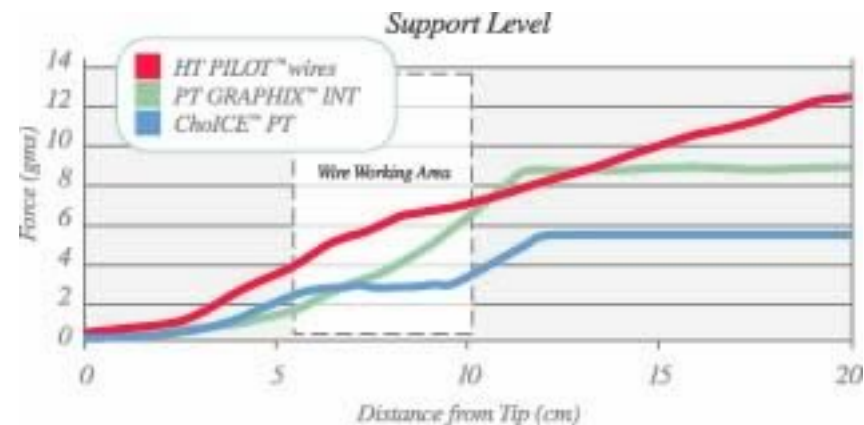


* As compared to CHOICE® PT and PT GRAPHIX™ INT. Tests performed by and data on file at Guidant.

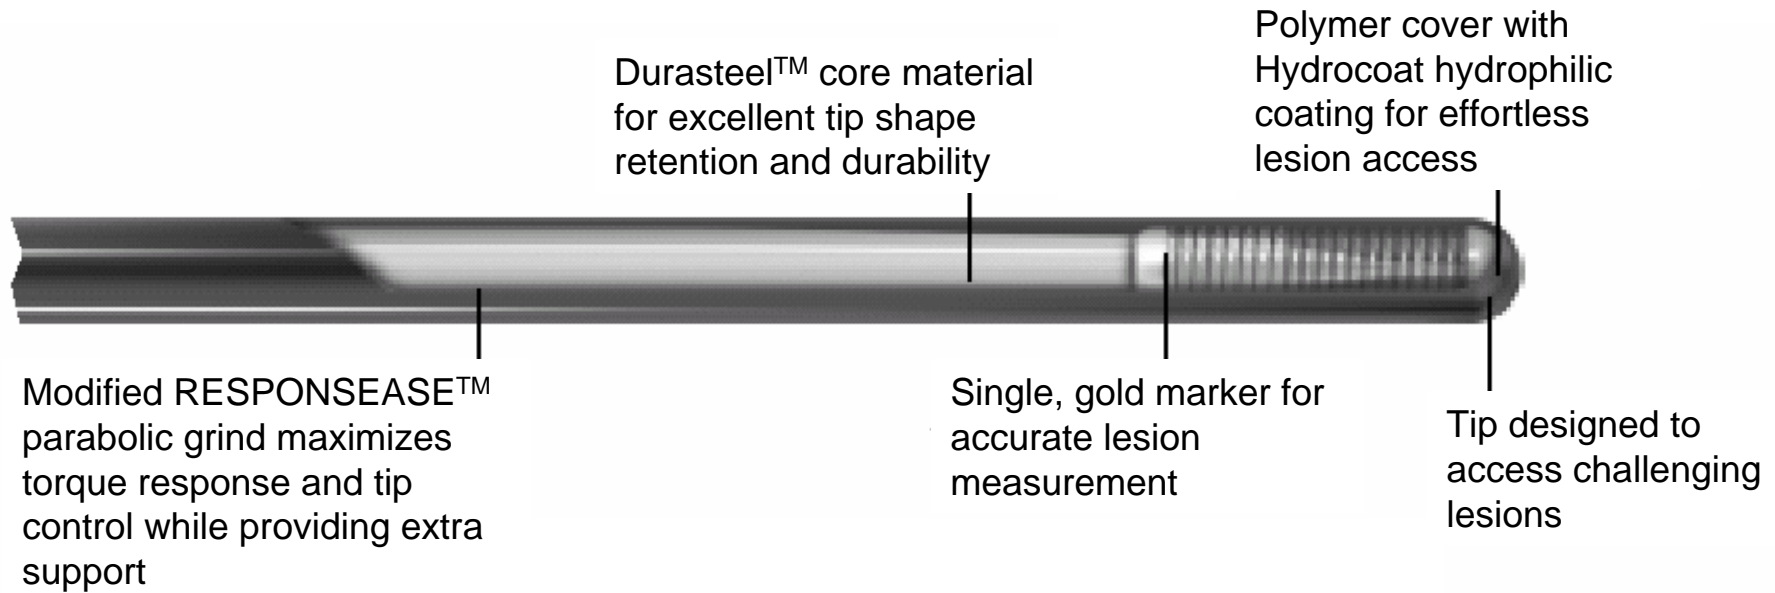

4) Lesion Measuring Tool

- 15 mm spacing from radiopaque tip coils to single radiopaque marker*

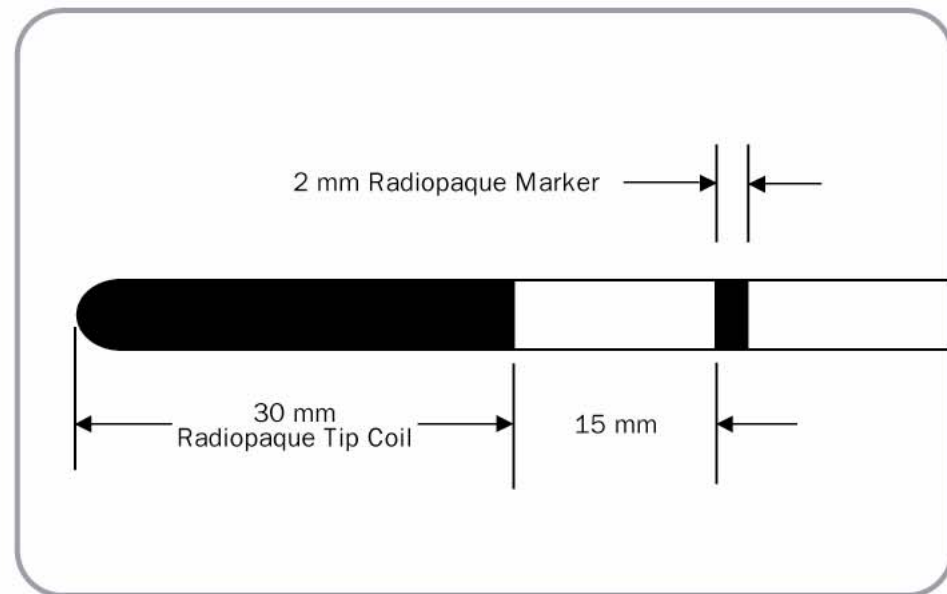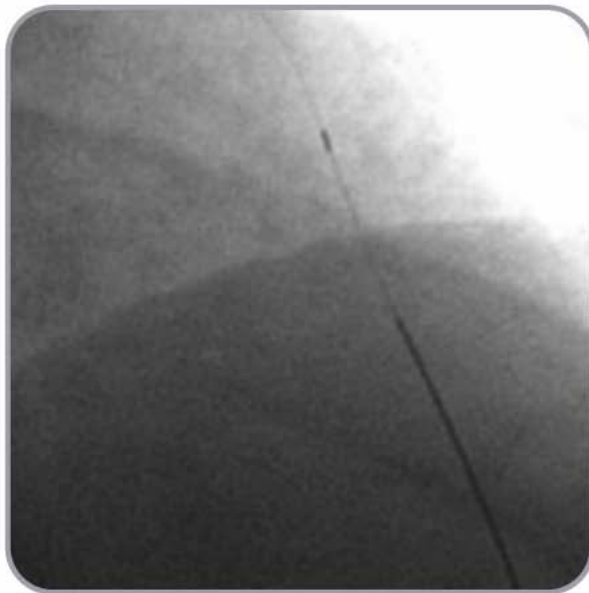

* Marker configuration similar to HI-TORQUE BALANCE MIDDLEWEIGHT UNIVERSAL™ which is shown here. Photo on file at Guidant.

Ordering Information



HI-TORQUE PILOT 50

Description	Stock #	Wire diameter	Wire length	Tip shape	Tip radiopacity
HI-Torque Pilot 50	1010480-H	0,014 in / 0,35 cm	190 cm	straight	3 cm
HI-Torque Pilot 50	1010480-HJ	0,014 in / 0,35 cm	190 cm	J	3 cm
HI-Torque Pilot 50	1010483-H	0,014 in / 0,35 cm	300 cm	straight	3 cm
HI-Torque Pilot 50	1010483-HJ	0,014 in / 0,35 cm	300 cm	J	3 cm



HI-TORQUE PILOT 150

Description	Stock #	Wire diameter	Wire length	Tip shape	Tip radiopacity
HI-Torque Pilot 150	1010481-H	0,014 in / 0,35 cm	190 cm	straight	3 cm
HI-Torque Pilot 150	1010481-HJ	0,014 in / 0,35 cm	190 cm	J	3 cm
HI-Torque Pilot 150	1010484-H	0,014 in / 0,35 cm	300 cm	straight	3 cm
HI-Torque Pilot 150	1010484-HJ	0,014 in / 0,35 cm	300 cm	J	3 cm



HI-TORQUE PILOT 200

Description	Stock #	Wire diameter	Wire length	Tip shape	Tip radiopacity
HI-Torque Pilot 200	1010482-H	0,014 in / 0,35 cm	190 cm	straight	3 cm
HI-Torque Pilot 200	1010482-HJ	0,014 in / 0,35 cm	190 cm	J	3 cm
HI-Torque Pilot 200	1010485-H	0,014 in / 0,35 cm	300 cm	straight	3 cm
HI-Torque Pilot 200	1010485-HJ	0,014 in / 0,35 cm	300 cm	J	3 cm